



erwin Data Modeler

Release Notes

Release 2020 R2

Legal Notices

This Documentation, which includes embedded help systems and electronically distributed materials (hereinafter referred to as the “Documentation”), is for your informational purposes only and is subject to change or withdrawal by erwin Inc. at any time. This Documentation is proprietary information of erwin Inc. and may not be copied, transferred, reproduced, disclosed, modified or duplicated, in whole or in part, without the prior written consent of erwin Inc.

If you are a licensed user of the software product(s) addressed in the Documentation, you may print or otherwise make available a reasonable number of copies of the Documentation for internal use by you and your employees in connection with that software, provided that all erwin Inc. copyright notices and legends are affixed to each reproduced copy.

The right to print or otherwise make available copies of the Documentation is limited to the period during which the applicable license for such software remains in full force and effect. Should the license terminate for any reason, it is your responsibility to certify in writing to erwin Inc. that all copies and partial copies of the Documentation have been returned to erwin Inc. or destroyed.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, ERWIN INC. PROVIDES THIS DOCUMENTATION “AS IS” WITHOUT WARRANTY OF ANY KIND, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT. IN NO EVENT WILL ERWIN INC. BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY LOSS OR DAMAGE, DIRECT OR INDIRECT, FROM THE USE OF THIS DOCUMENTATION, INCLUDING WITHOUT LIMITATION, LOST PROFITS, LOST INVESTMENT, BUSINESS INTERRUPTION, GOODWILL, OR LOST DATA, EVEN IF ERWIN INC. IS EXPRESSLY ADVISED IN ADVANCE OF THE POSSIBILITY OF SUCH LOSS OR DAMAGE.

The use of any software product referenced in the Documentation is governed by the applicable license agreement and such license agreement is not modified in any way by the terms of this notice.

The manufacturer of this Documentation is erwin Inc.

Provided with “Restricted Rights.” Use, duplication or disclosure by the United States Government is subject to the restrictions set forth in FAR Sections 12.212, 52.227-14, and 52.227-19 (c)(1) - (2) and DFARS Section 252.227-7014(b)(3), as applicable, or their successors.

Copyright © 2020 erwin Inc. All rights reserved. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Contact erwin

Understanding your Support

Review [support maintenance programs and offerings](#).

Registering for Support

Access the [erwin support](#) site and click **Sign in** or **Sign up** to register for product support.

Accessing Technical Support

For your convenience, erwin provides easy access to "One Stop" support for all editions of [erwin Data Modeler](#), and includes the following:

- Online and telephone contact information for technical assistance and customer services
- Information about user communities and forums
- Product and documentation downloads
- erwin Support policies and guidelines
- Other helpful resources appropriate for your product

For information about other erwin products, visit <http://erwin.com/products>.

Provide Feedback

If you have comments or questions, or feedback about erwin product documentation, you can send a message to techpubs@erwin.com.

erwin Data Modeler News and Events

Visit www.erwin.com to get up-to-date news, announcements, and events. View video demos and read up on customer success stories and articles by industry experts.

Contents

Legal Notices	2
Contents	4
erwin Data Modeler Editions	8
Standard Edition	9
Workgroup Edition	10
Navigator Edition	12
Academic Edition	13
Sample Model	14
New Features and Enhancements	17
DM Connect for DI	17
Central NSM	17
Snowflake Support	17
MariaDB Support	18
JDBC Support for SQL Server, Snowflake, SAP ASE, and SQL Azure	18
Oracle 11g Support Dropped	18
Third Party Tools	18
System Information	19
Release Numbering Scheme in erwin Data Modeler	20
Operating System Support	21
System Requirements	22
erwin Data Modeler	22
erwin Mart Server	22

Administrative Privileges Required	25
Supported Target Databases	26
Limitations in Hive	28
erwin Data Modeler Workgroup Edition Requirements	29
Administrator Server System Requirements	30
DBMS Requirements	31
Client Workstation Requirements	33
erwin Data Modeler Navigator Edition Requirements	34
Support for erwin Data Modeler Navigator Edition	35
Installation Considerations for erwin Data Modeler Workgroup Edition	36
erwin Data Modeler and Mart Release Numbers	37
Microsoft SQL Server 2005 onward Permissions	38
Specify Use of Foreign Characters With Microsoft SQL Server	39
Installation Considerations for erwin Data Modeler Navigator Edition	40
Silent Install	41
General Considerations for Using erwin Data Modeler Workgroup Edition	42
Model Display in the Difference Reconciliation Dialog	43
Uninstalling erwin Data Modeler Workgroup Edition	44
General Considerations for Using erwin Data Modeler Navigator Edition	45
Model Display in the Difference Reconciliation Dialog	46
Help Files	47
Known Issues	48
RedShift FE - Few functions do not execute from erwin DM FE Wizard	50

Redshift REC - Comments are Truncated at 65536 Characters	51
Redshift REC - Properties of Library Object are not Retrieved	52
RedShift REC-Column Values need to Follow the Exact Order According to Partition Specification	53
Redshift REC - Performance is Slow in Redshift for REDB Process	53
Db2 z/OS-ESX-1015,190110 Messages are Displayed on Copy-pasting a Table that has a Period Clause	54
NSM P to L: Derive PO model to LO with NSM Template attached	55
erwin Data Modeler cannot Connect to erwin Mart Server on Host Machine	56
API-Related Features do not Work on a Windows 2008 R2 SP1 Machine	56
Netezza REC- Comments are Truncated at 1024 Characters	57
SQL 1105 Error	58
Model and Version Name Limit on Oracle	59
.Net Requirement	60
Report on Glossary Words Includes Extra Characters	61
Updating Profile Description from Notepad	62
Unwanted Result Rows in Report	63
DSM Logical to SQL Server 2012	64
Report Designer Functions for a Large Model	65
Subject Area Picture Report not Generated	66
Incorrect UDP in UDP Report	67
Invalid Column Node for Db2 LUW Model in View Report	68
Mart Server Name in Korean	69
Generating Reports with Korean Characters in User Name	70

Error While Creating a Profile Using Special Characters in Mart Administrator	71
File IO: For a Parent or Child Table with Multiple Child Tables, Other Child FK Attributes are Highlighted on Mouse Hover on One Relationship	72
Owner Name not Displayed while Sorting a Guided Editor's list of Objects	73
Fixed Issues	74
Issues Fixed in this Release	75
Documentation	78
Appendix	80
Third Party Software Acknowledgment	81

erwin Data Modeler Editions

The following editions of erwin Data Modeler are available:

[Academic Edition](#)

[Standard Edition](#)

[Workgroup Edition](#)

[Navigator Edition](#)

This *Release Notes* details new features, enhancements, updates, and known issues for all editions of erwin Data Modeler.

Note: The features of erwin Data Modeler that are available to you depend on the edition that you are using. For more information about the differences between versions, click one of the Edition links.

Standard Edition

erwin Data Modeler Standard Edition provides all the data modeling features used by Data Architects, Data Administrators, and Application Administrators, but does not include any workgroup modeling capabilities. You can use this edition as a standalone modeling tool, and as a Workgroup Edition client that can access and work with data models stored in a mart. When you enable data movement or dimensional modeling features, it provides a tool for assisting Data Administrators and Capacity Managers design data warehouses. Partners can use the API to create add-on solutions to erwin Data Modeler.

Workgroup Edition

erwin Data Modeler Workgroup Edition provides all the data modeling features used by Data Architects and also includes workgroup modeling capabilities used by Database Administrators, Application Administrators, and Application Owners. It provides conflict resolution, versioning, security and standardization for multi-user modeling. Workgroup modeling operates in a client/server environment so processing is shared between the user client workstation and the server where the models are stored. Users access the stored models through a client, such as erwin Data Modeler. Models are held in a platform and network independent database or mart that resides on a central server, using Microsoft SQL Server, Oracle, or PostgreSQL as the host database.

The key features of erwin Data Modeler Workgroup Edition include:

Web-based administrator (erwin Mart Administrator)

Helps the administrator administer the Mart. The administrator creates the Mart database, installs and configures erwin Mart Administrator before users can connect to the Mart. erwin Mart Administrator is hosted on a web server and is accessed through an Internet browser.

Model change impact analysis

Provides a change summary showing the impact of changes and the history of the affected model objects, allowing you to select which changes to apply to the model repository.

Version management

Lets Data Architects store, access and analyze the history of a model and the changes made to it, lock down specific versions, run difference reports between versions, and seamlessly roll back models to previous states as required.

Concurrent model access with optional model locking

Allows multiple users to concurrently work on a given model without compromising the integration and integrity of their parallel efforts.

The administrator installs the program and initializes the database on the DBMS server. The administrator also has the responsibility of setting up the library structure in which models are organized, and assigning security profiles to users. Administration overhead is relatively low and proportional to the number and activity level of the users. After a model is saved to the database, control of who can work on the model and how changes are saved to the model is handled by security, making it possible for workgroups to work on large models without confusion. erwin Data Modeler Workgroup Edition supports many security and administrative features related to its multiuser capabilities and the client/server environment in which it operates. For this reason, routine management is usually performed by a dedicated administrator. Administrators can find detailed information regarding their tasks and responsibilities in the erwin Data Modeler Workgroup Edition Administration Guide.

You can also use erwin Data Modeler Navigator Edition as a client. Read-only access is permitted to data models, so your workgroup can use this client to share information with others without the risk that unauthorized changes might be saved to the mart.

Navigator Edition

erwin Data Modeler Navigator Edition provides a cost-effective way to provide read-only access to models built with erwin Data Modeler for viewing and analysis. This edition does not permit you to make any changes to models.

The key features of erwin Data Modeler Navigator Edition include:

Read-only access

Read-only access is provided to models created by erwin Data Modeler and it can also be used as a Workgroup Edition client for viewing a data model stored in a mart. Use the Navigator Edition to easily share model information without the risk of unauthorized changes to a model.

Navigation and Viewing

Provides those who need to view models, but not update them, full navigation and viewing of data models.

Reporting and Publication

Offers reporting and printing capabilities that generate in a variety of formats, including HTML and PDF.

Academic Edition

The Academic Edition is a time-limited edition and includes a limited number of features from the main product. It is designed to help students to learn creating simple data models.

Sample Model

When you install erwin Data Modeler, two sample models, eMovies and PublicationSystemSample are installed. Use these models as examples to learn data modeling and to learn how to use the tool.

These models are available in the following folder:

```
<install folder>\erwin\Data Modeler r9\BackupFiles\Samples\Standard
```

Note: If you access the sample model from the install folder, you must run the data modeling tool as an administrator to open the eMovies model.

eMovies

The business requirements of this model are as follows:

- Manage employee details
- Manage store details
- Manage movie details
- Manage copies of movies
- Manage customer details
- Maintain movie rental details for customers
- Record payment details for rented movies
- Display the credit status of customers
- Generate invoices for customers
- Display overdue details for customers
- Search for customers
- Search for movies that are rented based on the rented date, customer phone number, employee number, or movie number

Apart from entities, attributes, and relationships, this model serves as an example for the following features:

- Domains
- Logical Model
- Subject Area
- Annotation
- Key Groups
- ER Diagrams
- Naming Standards Object
- Data Type Standards Object
- Themes
- Validation Rules

PublicationSystemSample

The PublicationSystemSample model provides an example of a book publication company.

The business requirements of this model are as follows:

- Diagrams
 - The Diagrams can be easily shared with other project team members by exporting them to .EMF format during project analysis. The diagrams also support project communication using the Report Designer and different diagram presentation options while viewing models in the erwin Web Portal.
- Documentation
 - This object serves as an example for the following features:
 - Model
 - Diagram
 - Subject Area
 - Entity
 - Attribute
- Theme override options
- Diagram Annotations

New Features and Enhancements

Following new features and enhancements are available in erwin Data Modeler and erwin Mart Server 2020 R2.

[DM Connect for DI](#)

[Central NSM](#)

[Snowflake Support](#)

[MariaDB Support](#)

[JDBC Support for SQL Server, Snowflake, SAP ASE, and SQL Azure](#)

[Oracle 11g Support Dropped](#)

[Third Party Tools](#)

The list includes a brief description and wherever relevant, a reference to more information about each feature.

DM Connect for DI

erwin now offers an integration, [DM Connect for DI](#), between erwin Data Modeler (DM) and erwin Data Intelligence Suite (DI Suite). This offering enables you to sync data between erwin DM and erwin DI Suite using erwin Mart Administrator as an interface; thus maintaining a single metadata and glossary source.

Central NSM

erwin Mart now lets you [save NSM files centrally](#) in the CSV format. You can import and attach these files to models in erwin Mart Administrator. If required, you can edit them in erwin Mart Administrator and [sync them to a model in erwin Data Modeler](#) or utilize as business assets (business term) in erwin Data Intelligence Suite.

Snowflake Support

erwin Data Modeler now supports Snowflake 4.10.x as a target database. For information on supported objects and data types, refer [Snowflake 4.10.x](#).

MariaDB Support

erwin Data Modeler now supports MariaDB 10.x as a target database. For information on supported objects and data types, refer [MariaDB 10.x](#).

JDBC Support for SQL Server, Snowflake, SAP ASE, and SQL Azure

erwin Data Modeler now includes Codemesh-based JDBC support for SQL Server, Snowflake, SAP ASE, and SQL Azure database connectivity. For more information, refer [Database Connection Parameters](#).

Oracle 11g Support Dropped

Starting release 2020 R2, Oracle 11g support has been dropped for erwin Mart Server. Oracle 12c R2 or higher versions of Oracle continue to be supported.

Third Party Tools

Support for several third-party tools has been upgraded to newer versions as follows:

- Tomcat v9.0.35
- AdoptOpenJDK (build 11.0.6+10)
- OpenSSL 1.1.1c

System Information

Review the following system information before installing and using the product.

This section contains the following topics

[Release Numbering Scheme in erwin Data Modeler](#)

[Operating System Support](#)

[System Requirements](#)

[Administrative Privileges Required](#)


[Supported Target Databases](#)

[erwin Data Modeler Workgroup Edition Requirements](#)

[erwin Data Modeler Navigator Edition Requirements](#)

Release Numbering Scheme in erwin Data Modeler

Information about the release is displayed in the *About erwin Data Modeler* dialog box using the following release numbering scheme:

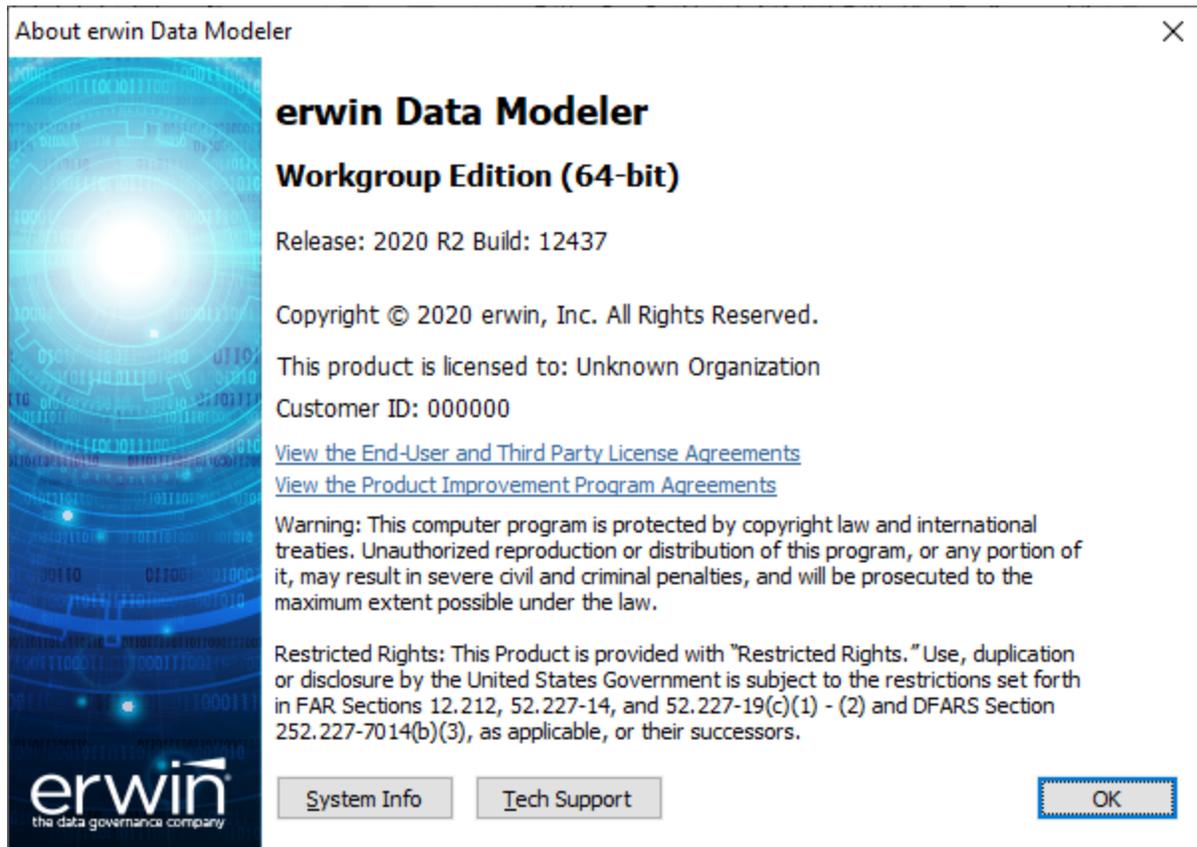

The first number always indicates the (GA) release year, the second number indicates the service pack number of the main release, the third number indicates the build number of the product. For example, "Release: 2020 R2 Build: 12437" in this dialog indicates Release Year 2020, Patch Release R2, Build 12437.

Operating System Support

To run erwin Data Modeler it is recommended that you have the latest version of one of the operating systems (32-bit or 64-bit) installed:

- Microsoft Windows 8.1
- Microsoft Windows 10
- Microsoft Windows Server 2012, R2
- Microsoft Windows Server 2016
- Microsoft Windows Server 2019

Note:

As a best practice, always upgrade your operating system to its latest available version.

erwin Data Modeler 32-bit (these notes do not apply to the 64-bit version of erwin Data Modeler) is fully compatible with 64-bit operating systems, except for the following known issues:

64-bit database drivers and clients will not work with erwin Data Modeler 32-bit. The work-around is to use 32-bit database drivers and clients even if running in the 64-bit operating system environment.

Running the erwin Data Modeler 32-bit API in a 64-bit environment requires some changes to the workstation registry. For more information about changing the registry, see the erwin Data Modeler Workgroup Edition Implementation and Administration Guide.

System Requirements

You can use any of the following combinations to install erwin Data Modeler, the Mart database, and the MartServer application:

- Install erwin Data Modeler, the Mart database, and the MartServer application on the same computer.
- Install erwin Data Modeler, the Mart database, and the MartServer application on different computers.
- Install erwin Data Modeler and the Mart database on one computer, and install the MartServer application on a different computer.
- Install erwin Data Modeler on one computer, and install the Mart database and the MartServer application on a different computer.

Note: Ensure that you always install the MartServer application on the Windows operating system.

erwin Data Modeler

This topic includes the system requirements for the computers on which you plan to install erwin Data Modeler, the Mart database, and the MartServer application.

The following requirements must be met or exceeded for erwin Data Modeler to install and run correctly:

- Microsoft-based workstation, Intel Dual Core processor or equivalent
- 5 GB available hard drive space
- 4 GB RAM minimum; more is recommended for larger models

Note: Ensure that your screen resolution is 1024 x 768 or higher. If your screen resolution is less than the minimum supported, some portions of the screen will not be visible.

erwin Mart Server

The following requirements must be met or exceeded for the computer on which you install the MartServer application:

Hardware requirements (based on physical hardware performance, not a virtual environment):

- 2 GHZ or higher dual core processor
- 4 GB RAM (8 GB or more for large marts)
- 10 GB of disk space or more as required to support your specific mart

Operating system requirements:

- Microsoft Windows 8.1
- Microsoft Windows 10
- Microsoft Windows Server 2012, R2
- Microsoft Windows Server 2016
- Microsoft Windows Server 2019
- Microsoft .NET Framework 4.0 and above
- All current Microsoft Windows critical updates

Database:

- Microsoft SQL Server 2012, 2014, 2014 SP1, 2016, 2016 SP1, 2016 SP2, or the certified versions 2017 and 2019
- Oracle 12c or the certified versions 12c R2, 18c, and 19c
- PostgreSQL through V9.6.2 and certified on 9.6.15, 10.10, and 11.5
Additionally, PostgreSQL is certified as follows:
 - version 11.6 for Amazon RDS and Amazon Aurora
 - version 12.3 for Amazon RDS
- .

The erwin Mart Administrator web client meets the following requirements:

Supported browsers:

- Microsoft Internet Explorer v10 or newer
- Mozilla Firefox v30 or newer

- Google Chrome v30 or newer
- Apple Safari 6 or newer

Note: Ensure that your screen resolution is 1024 x 768 or higher. If your screen resolution is less than the minimum supported, some portions of the screen will not be visible.

Administrative Privileges Required

Ensure that you have administrative privileges in the following scenario:

- **erwin Data Modeler:** The installation process for erwin Data Modeler (DM) writes to the registry and system folders. If you install, upgrade, or remove erwin DM without Administrative privileges, all files may not be installed or upgraded, causing problems while running the software.

Supported Target Databases

The application supports or is compatible with the following target databases:

- Db2 for i (5.x/6.x/7.x)
- Db2/LUW (9.5, 9.7/10.x, 11.1)
- Db2 for z/OS (8.1, 9.1/10/11, 12)
- Hive (2.1.x)
Note: Refer to the [Limitations in Hive](#) topic.
- Informix (10.x/11.x/12.x)
- MariaDB (10.x)
- MySQL (5.x)
- Netezza (7.2)
- ODBC/Generic (2.x, 3.x)
- Oracle (11g/12c)
(Versions 12c R2, 18c, and 19c are certified)
- PostgreSQL 9.6
Versions 9.6.15, 10.10, and 11.5 are certified. Additionally, PostgreSQL is certified as follows:
 - version 11.6 for Amazon RDS and Amazon Aurora
 - version 12.3 for Amazon RDS
- Progress (9.x/10.x/11.x)
- Redshift 1.0
- SAS (stabilized support)
- SQL Azure
- SQL Server (2012, 2014, 2016/2017/2019)
(Versions 2017 and 2019 are certified)
- SAP ASE 15.x/16

- SAP IQ (15.x/16)
- Snowflake (4.10.x)
- Teradata Database (14.10, 15.x/16.x)

Note: The erwin Data Modeler 64-bit version is not verified for the Progress 9.x/10.x database.

Limitations in Hive

The following list summarizes the limitations in pure Hive (connection to Hive database directly):

- Reverse engineering from database processing is slow due to the absence of system tables. The required information is retrieved by manual parsing methods instead of a query language.
- User-defined functions are not supported.
- Retrieval of version information using the Hive command is not supported.
- A few index properties, such as deferred rebuild option, idxProperties, and Null Defined As are not supported.

erwin Data Modeler Workgroup Edition Requirements

If you plan to use erwin Data Modeler Workgroup Edition, review the following requirements to ensure your workgroup environment is set up properly.

More information:

[Administrator Server System Requirements](#)

[DBMS Requirements](#)

[Client Workstation Requirements](#)

Administrator Server System Requirements

The disk space required for the administrative files used to create and manage the database is separate from the disk space required to accommodate models on the server where the database is located. Greater CPU speed, and more RAM and disk space result in better performance.

DBMS Requirements

Before you install erwin Data Modeler to use a MartServer in a workgroup environment, ensure that you are using a supported DBMS as your host server. This release supports the following host DBMSs:

- Oracle 12c or the certified versions 12c R2, 18c , and 19c
- Microsoft SQL Server 2012, 2014, 2014 SP1, 2016, 2016 SP1, 2016 SP2 or the certified versions 2017 and 2019
- PostgreSQL through release 9.6.2, certified on PostgreSQL 9.6.15, 10.10, and 11.5. Additionally, PostgreSQL is certified as follows:
 - version 11.6 for Amazon RDS and Amazon Aurora
 - version 12.3 for Amazon RDS

To create, update, or delete a mart in erwin Data Modeler Workgroup Edition, you must have the following database rights:

- For Microsoft SQL Server 2012, 2014, 2014 SP1, 2016, 2016 SP1, 2016 SP2, 2017, and 2019 you must be the database owner (dbo).

Notes:

The dbo is no longer required to have the sysadmin role.

The SQL Server 2012, 2014, 2014 SP1, 2016, 2016 SP1, 2016 SP2, 2017, and 2019 TRUSTWORTHY database property is no longer required for the mart. After you install this product, you can optionally reset this property to OFF.

- For Oracle, you must be the database schema owner and have the DBA role.

Before you install Mart on the server, verify that the DBMS environment is prepared for the installation, and that the server system requirements meet at least the minimum specifications. At least one user with administrative privileges is available on the DBMS.

Note: The dbo role for Microsoft SQL Server is necessary only during the installation or upgrade. You can strip the installer of the dbo role after the installation or upgrade is complete.

For more information about preparing the DBMS environment, see the erwin Data Modeler Workgroup Edition Implementation and Administration Guide.

Client Workstation Requirements

You must install erwin Data Modeler on each client workstation that needs to access the Mart Server to connect to the Mart. It is recommended that client workstations have at least 4 GB of RAM.

You can install erwin Data Modeler Navigator Edition as a client for erwin Data Modeler Workgroup Edition.

Note: In a workgroup environment, erwin Data Modeler can connect to the Mart Server with the same release version.

erwin Data Modeler Navigator Edition Requirements

If you plan to use erwin Data Modeler Navigator Edition, review the following requirements to ensure your environment is set up properly.

Support for erwin Data Modeler Navigator Edition

erwin Data Modeler Navigator Edition is enabled for use with a mart-enabled version of erwin Data Modeler (Workgroup Edition). Consult with your mart administrator for a GUEST user permission to access models in erwin Data Modeler Workgroup Edition.

You must use a supported DBMS. This release supports the following host DBMSs:

- Oracle 12c or the certified versions 12c R2, 18c, and 19c
- Microsoft SQL Server 2012, 2014, 2014 SP1, 2016, 2016 SP1, 2016 SP2, or the certified versions 2017 and 2019
- PostgreSQL through release 9.6.2, certified on PostgreSQL 9.6.15, 10.10, and 11.5
Additionally, PostgreSQL versions 11.6 and 12.3 are certified for Amazon RDS.

Installation Considerations for erwin Data Modeler Workgroup Edition

Review the following installation considerations before installing the product. For more information about the installation process for a workgroup environment, see the erwin Data Modeler Workgroup Edition Implementation Guide.

This section contains the following topics

[erwin Data Modeler and Mart Release Numbers](#)

[Microsoft SQL Server 2005 onward Permissions](#)

[Specify Use of Foreign Characters With Microsoft SQL Server](#)

erwin Data Modeler and Mart Release Numbers

You must install a Mart or must upgrade to a Mart that is of the same release number as erwin DM. For example, install or upgrade to an r9.5.0 Mart when you install or upgrade to erwin DM r9.5.0. Using different versions of erwin DM and Mart may lead to unexpected results including corruption of the Mart database or the models. Therefore, we recommend that you install the same release of the Mart and erwin DM.

Microsoft SQL Server 2005 onward Permissions

For SQL Server 2005 onward, you only need to have public assigned to save to the mart. However, when the repository is on a SQL Server 2005 or above instance, you need to have the bulkadmin permission designated as well. The ability to do bulk inserts (which was permitted by public, previously) is no longer part of the public permission. You must explicitly define this permission or when you attempt to save a model to a new mart instance created using a SQL Server 2005 or above database, an error "You do not have permission to use the bulk load statement." is returned.

Specify Use of Foreign Characters With Microsoft SQL Server

For Microsoft SQL Server modify your registry settings to have certain foreign language characters in your models recognized.

Follow these steps:

1. Click Run on the Start menu.
2. Enter *regedit*.

The Registry Editor opens.

3. Verify or add the following registry entry:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\MSSQLServer\Client\DB-Lib]
```

```
"AutoAnsiToOem"="ON"
```

```
"UseIntlSettings"="ON"
```

4. Click File, Exit.

Your configuration is set to recognize foreign language characters in your models.

[▲ Back to Top](#)

Installation Considerations for erwin Data Modeler Navigator Edition

Review the following installation considerations before installing the product. See the erwin Data Modeler Navigator Edition User Guide for more information about the installation process.

This section contains the following topics

[Silent Install](#)

Silent Install

This product does not provide an unattended or silent install.

General Considerations for Using erwin Data Modeler Workgroup Edition

The following sections contain general information you should know before using erwin Data Modeler in a workgroup environment.

This section contains the following topics

[Model Display in the Difference Reconciliation Dialog](#)

[Uninstalling erwin Data Modeler Workgroup Edition](#)

Model Display in the Difference Reconciliation Dialog

In a workgroup modeling environment, two users may check out and make changes to the same model. The first user may make changes to the model and save the changes to the mart. When the second modeler makes changes and saves them to the mart, the Difference Reconciliation dialog is displayed. You use features in this dialog to view the differences on the object level, the more detailed property level, or search the text of the comparison lists.

Note: In the Difference Reconciliation dialog, the model in the left pane is the current model that you are checking in to the mart. The model in the right pane is the version of the model already in the mart.

Uninstalling erwin Data Modeler Workgroup Edition

You can use the Windows uninstall utility to uninstall erwin Data Modeler. However, when you uninstall erwin Data Modeler in a workgroup environment, the mart database remains intact. To remove the database from your computer, delete the mart database first, and then uninstall erwin Data Modeler.

General Considerations for Using erwin Data Modeler Navigator Edition

The following sections contain general information you should know before using erwin Data Modeler Navigator Edition.

This section contains the following topics

[Model Display in the Difference Reconciliation Dialog](#)

[Help Files](#)

Model Display in the Difference Reconciliation Dialog

In a workgroup modeling environment, two users may check out and make changes to the same model. The first user may make changes to the model and save the changes to the mart. When the second modeler makes changes and saves them to the mart, the Difference Reconciliation dialog is displayed. You use features in this dialog to view the differences on the object level, the more detailed property level, or search the text of the comparison lists.

Note: In the Difference Reconciliation dialog, the model in the left pane is the current model that you are checking in to the mart. The model in the right pane is the version of the model already in the mart.

Help Files

The context sensitive online help in erwin Data Modeler Navigator Edition is identical to the online help in erwin Data Modeler. This means that the online help may discuss capabilities such as saving a model that is not possible in the erwin Data Modeler Navigator Edition product.

Known Issues

This section contains the known issues that you should review before using the application.

[RedShift FE - Few functions do not execute from erwin DM FE Wizard](#)

[Redshift REC - Comments are Truncated at 65536 Characters](#)

[RedShift REC - The properties are not retrieved for library object in RedShift](#)

[RedShift REC-Column Values need to Follow the Exact Order According to Partition Specification](#)

[Redshift REC - Performance is Slow in Redshift for REDB Process](#)

[Db2 z/OS-ESX-1015,190110 Messages are Displayed on Copy-pasting a Table that has a Period Clause](#)

[NSM P to L: Derive PO Model to LO with NSM Template Attached](#)

[erwin Data Modeler cannot Connect to erwin Mart Server on Host Machine](#)

[Netezza REC- Comments are Truncated at 1024 Characters](#)

[SQL 1105 Error](#)

[Model and Version Name Limit on Oracle](#)

[.Net Requirement](#)

[Report on Glossary Words Includes Extra Characters](#)

[Updating Profile Description from Notepad](#)

[Unwanted Result Rows in Report](#)

[DSM Logical to SQL Server 2012](#)

[Report Designer Functions for a Large Model](#)

[Subject Area Picture Report not Generated](#)

[Incorrect UDP in UDP Report](#)

[Invalid Column Node for Db2 LUW Model in View Report](#)

[Mart Server Name in Korean](#)

[Generating Reports with Korean Characters in User Name](#)

[Error While Creating a Profile Using Special Characters in Mart Administrator](#)

[File IO: For a Parent or Child Table with Multiple Child Tables, Other Child FK Attributes are Highlighted on Mouse Hover on One Relationship](#)

Owner Name not Displayed while Sorting a Guided Editor's list of Objects

RedShift FE - Few functions do not execute from erwin DM FE Wizard

Due to a limitation in the driver, few SQL language functions do not execute in DB from erwin DM FE wizard. However, the same functions work in the DB client.

Redshift REC - Comments are Truncated at 65536 Characters

Due to an ODBC restriction, all comments are limited to 65536 characters. In addition to this, retrieval of large number of characters in comments or SQL text, requires one to change the following under ODBC settings > Data Type Options:

- Increase the value of Max Varchar.
- Clear the Use Unicode option.

Note: To retrieve the maximum length of the object names, select the Use Unicode option. At a time, you can choose to either retrieve large number of characters in comments/SQL text or object names.

Redshift REC - Properties of Library Object are not Retrieved

Due to unavailability of system tables to store library properties, the properties of a Redshift Library object are not retrieved.

RedShift REC-Column Values need to Follow the Exact Order According to Partition Specification

Column values are retrieved only according to the column order defined in the Partition By clause. To ensure that column name and column values correctly map to each other, follow the column order defined in the Partition By clause in the Create statement.

Redshift REC - Performance is Slow in Redshift for REDB Process

The time taken for an REDB process on a Redshift database depends on the network speed and the geographical location of your database instance.

The following table shows the results for a database with 200 tables, 250 views, and other supported objects:

Network Speed	With all options in RE Option Set	Without Partition Element option (Default option set)	Without external tables (Unselect 'S3BucketObjects' option)
50 Mbps	4 Hours	3 Hours	2 Hours
1 Gbps	1 Hour	14 Minutes	4 Minutes

As a best practice, use the default option set when not working on Partitions.

Db2 z/OS-ESX-1015,190110 Messages are Displayed on Copy-pasting a Table that has a Period Clause

While copy-pasting a Db2 z/OS table that has a period clause from one model to another, ESX-1015,190110 messages are displayed. Also, the period clause properties are not retained and are disabled on the UI.

NSM P to L: Derive PO model to LO with NSM Template attached

While deriving a PO model; that does not have NSM objects, to LO model, if you attach an NSM template, a List NSM Option Objects dialog is displayed. If you do not select an object here, although the model will be derived, naming standards will not be applied.

erwin Data Modeler cannot Connect to erwin Mart Server on Host Machine

erwin Data Modeler (DM) cannot connect to the erwin Mart Server (MS) on an erwin Mart Server host machine. This happens because the client application version is different from the erwin MS version. To counter this issue, do the following:

1. Open Internet Explorer.
2. Click Internet options.
3. Go to the Security tab.
4. Set security level to low.
5. Click Sites.
6. Add `http://machine-name:18170/MartAdmin/` or `http://ip address:18170/MartAdmin/`
7. Try to connect the Mart from erwin DM with IP address or machine name.

API-Related Features do not Work on a Windows 2008 R2 SP1 Machine

On a Windows 2008 R2 SP1 machine, a bug in the operating system causes an access violation, due to which, API-related features (MITI, and erwin Spy) do not work.

Netezza REC- Comments are Truncated at 1024 Characters

Due to an SQL text retrieval restriction on Netezza side, all comments are limited to 1024 characters.

SQL 1105 Error

When you are upgrading to the current release on Microsoft SQL Server in a workgroup environment, during the mart conversion process, you may get the message "Sql 1105" if you run out of free hard disk space during the process.

Stop the conversion process, and either free or add hard disk space. Delete the already created r9 tables and then re-attempt the conversion.

Model and Version Name Limit on Oracle

In a workgroup environment, when you save a model to an Oracle mart, the model name must be less than 130 characters. If you exceed the 130 character limit, the model will not save. Because the version name is derived from the model name (for example, <ModelName>:<version number> by <UserName> on <VersionCreateDate>), you should use model names considerably less than 130 characters in length to avoid problems with saving a model version.

.Net Requirement

The current release requires .NET 4.7.1 to be installed on your system. If you do not have it installed, the erwin Data Modeler installation will attempt to install it. After you install the .NET framework, you must restart the computer to make the changes take effect.

Report on Glossary Words Includes Extra Characters

Suppose a report is generated on a model that includes an NSM object. If the glossary words are included in the report, extra characters appear for all glossary words.

Updating Profile Description from Notepad

In the erwin Mart Administrator Profile Management page, suppose the description is copied and pasted from a Notepad file and is saved. The updated description displays syntax (`\n`) as well.

Unwanted Result Rows in Report

In a Subject Area report, suppose the Subject Area name is included in the report and the diagram name is specified at run time. The report lists all Subject Areas instead of the Subject Area that corresponds to the selected diagram.

DSM Logical to SQL Server 2012

Suppose a Logical/Physical SQL Server 2012 model is attached with a DSM object that is active. Suppose a new Logical Definition for the Number domain is created and mapped to SQL Server 2012 and Date is selected for domain. If the newly created Logical Definition is applied to a column in a model, and if the physical view is seen, the data type is still displayed as Number.

Report Designer Functions for a Large Model

Generating reports is a memory intensive process and when the data set is very large, the process uses the maximum memory. When the maximum memory is consumed, a warning message informs you that the application might stop responding if you continue processing the report. If you choose to continue to run the report and the memory is completely used, the program might stop responding. If you choose not to continue, the report execution is terminated.

To resolve this problem, you can generate multiple small reports with fewer properties.

Subject Area Picture Report not Generated

There is a limitation on the size of a diagram report that you can generate--the maximum size is 1900 x 1440. Suppose you create a Subject Area report for a large model using Report Designer, and export the report to HTML. If you click the diagram in the HTML report, it does not open.

To resolve this problem, reduce the zoom level of the model to reduce the picture size and then generate the report.

Incorrect UDP in UDP Report

Suppose you want to generate a report on the UDPs using Report Designer. Suppose you have already created a UDP report template and generated the report for a different model. If you close the model, open another model, and use the same template to generate the UDP report, then the report includes the UDP name from the previous model. In the result grid, the column heading shows the UDP name of the previous model, while the UDP value is of the current model. In addition, the properties of the Report Explorer also shows the UDP name of the previous model. However, the Report Properties dialog shows the correct UDP name.

Invalid Column Node for Db2 LUW Model in View Report

In a Db2 LUW model, suppose a nickname table and a view exist and a Column Option level UDP is added to a column. If a View report is generated using the Report Designer, the Column Option node is available for View. If a user selects the Column Option node, the UDP is not included in the report for the selected column.

Mart Server Name in Korean

Suppose that you provide the Mart Server machine name in the Korean language (Korean characters) and configure the Mart Server. If you try to connect to the Mart from erwin DM and you provide the Korean language name for Server Name, the following message appears:

```
The client application version is different from the Mart Server
version. Install the same version of the application and the Mart
Server and then try.
```

If you try to log in to erwin Mart Administrator by using the Korean language name, it does not display.

Generating Reports with Korean Characters in User Name

Suppose that you have initialized a Mart with a user name that has Korean characters. You connect to the Mart with this user name and generate a report on Mart users (click Tools, Mart Reports, Global Reports, Users). The report is not generated and the message, You can not connect. Incorrect log on parameters is displayed. (The actual message is displayed in the Korean language. The message provided here is the translated message.)

Error While Creating a Profile Using Special Characters in Mart Administrator

When you create a profile in Mart Administrator using special characters such as !@#\$%^&*()_+={}:"-<>?|/.,;\[], and space, you will get one of the following error messages repeatedly and the Mart Administrator hangs.

```
Illegal Group
```

or

```
500 The call failed on the server; see server log for details
```

or

```
String index out of Range:1
```

To avoid this error, create a profile without using the special characters. When the Mart Administrator hangs, refresh the Mart Administrator.

File IO: For a Parent or Child Table with Multiple Child Tables, Other Child FK Attributes are Highlighted on Mouse Hover on One Relationship

If one parent/child entity has multiple children with different relationship lines, the migrated attributes in all child tables are highlighted on hovering the mouse on any one of the relationship lines.

For r7.x models being upgraded to r9.8, the work around for this is as follows:

On the Model Upgrade Wizard, go to the Subject Area tab and select the "Apply a default theme for all the diagram" check box and continue with the process.

Owner Name not Displayed while Sorting a Guided Editor's list of Objects

For Hive and Teradata the owner is a database and not an owner or schema. Therefore, while attempting to sort a guided editor (for example, Subject Area Editor) list of objects by Owner_Name + Object_Name, the owner name is not displayed.

Fixed Issues

This section includes the list of fixed issues in erwin Data Modeler and erwin Mart Server 2020 R2.

[Issues Fixed in this Release](#)

Issues Fixed in this Release

The following issues have been fixed in erwin Data Modeler and erwin Mart Server 2020 R2:

Issue Number	Issue Description
55044	For DB2 LUW, Alter script syntax also creates a syntax for dropping constraints and recreating tables instead of adding only a new column and constraint syntax
59821	SQL Server 2016 - Alter syntax -- SYSTEM_VERSIONING needs to be set off before dropping it
75663	erwin Mart XML-based reporting does not working in 2019 R1
78374	A Mart report with actual value of the UDP cannot be created
82483	Report Designer text output (CSV) contains carriage return characters
85538	erwin Data Modeler 2018 R1 crashes when re-adding subtype back to a diagram
84100	For SQL Server 2016, Alter Script Generation for a Temporal Table creates the temporary Table and then adds the Insert syntax from the renamed temp Table to the original Table
87066	erwin 9.8/2018R1/2019R1- Unable to open Database Role Editor in SQL Server 2014, 2016/2017
89447	Social Security Administration Model open dialog takes (60 seconds) to receive a response after the buttons are clicked
82742	RE from a SQL Server 2016 fails when selecting 2016/2017 as the target database in erwin DM, but works with errors on selecting 2012
89876	For PostgreSQL, Alter script for dropping not null constraint is incorrect in FE Alter
87288	Converted model from 3.5.2 to 2019 R1 crashes during Complete Compare with a blank model.
90108	Report Designer report of Primary Index and its members is incorrect for Teradata models, if Primary index members are not PK

Issue Number	Issue Description
91219	erwin DM 9.8 - Model crashes while doing a CC with a blank model
91305	RE from Hive - The word ACCOUNT is being used as a Reserved word during RE.
92161	Oracle 11g/12c - Alter-script generation for a FK index does not drop the existing index before creating an index with the same name.
92875	erwin 2019R1/2020R1-No RI trigger code generated if RI action changed
93835	SQL Server Functions -- Entering a ""Return Data Type"" for a Scalar Function causes Data Modeler to freeze
94071/96158	%ForEachTable() Macro documentation is incorrect in the tool / ForEachTable macro isnot restricted to a specific table
94411	Model Sources are out of context when accessed from the Model Explorer
94073	Documentation in Macro Toolbox for %TLX is incorrect
96189	erwin 2020R1- Model relationship editor sort issues - Physical relationship name sorts on Logical names
98473	Retain Migrated Columns option removes index when relationship is deleted
95689	WriteFile Function adds extra Carriage Return (CR) when writing externally to a text file. It works fine inside a FET file.
100907	Garbled Korean characters appear in Custom Mart Report
100821	Uninstalling erwin DM 2020 R1-64-bit corrupts 32-bit mfc140.dll and Visual C++ 2015+ x86 files
102510	SQL Server: Cannot rename a Column if it is part of Clustered ColumnStore Index
102937	After CC, when a new Subtype is added, the internal Subtype symbol name is changed
103028	Changing the target database from Oracle to PostgreSQL hides Table level Comments, but FE does have the Table Comments

Documentation

The Bookshelf provided with erwin Data Modeler, which is installed by default, includes documentation for erwin Data Modeler Navigator Edition. You can open the Bookshelf in a web browser from the erwin Data Modeler Start menu.

The documentation provided on the Bookshelf includes the following guides:

Deliverable Name	Format Provided
Add-In Manager Online Help	HTML
API Reference Guide	HTML and PDF
Data Modeling Overview Guide (This guide was earlier known as Methods Guide.)	HTML and PDF
Editing Forward Engineering Templates	HTML and PDF
Implementation Guide	HTML and PDF
Implementation and Administration Guide (Workgroup Edition) (The individual Administration and Implementation guides are merged to create one guide--Implementation and Administration Guide.)	HTML and PDF
Installation Guide	HTML and PDF
Metamodel Reference	HTML
erwin Data Modeler Online Help	HTML
erwin Mart Administrator Online Help	HTML
erwin Release Notes Mart Server Release Notes	HTML and PDF
erwin DM 2020 R2 Feature Tour	HTML and

	PDF
Template Language and Macro Reference	PDF
User Guide (Navigator Edition)	HTML and PDF
erwin DM Scheduler	HTML and PDF

Note: For more information about the erwin Data Modeler editions, see erwin Data Modeler Editions.

Appendix

This section contains the following topics:

[Third Party Software Acknowledgment](#)

Third Party Software Acknowledgment

The following license agreements are available in the Release Notes\Data Modeler Release Notes folder in erwin Bookshelf:

- [Tomcat 9.0.35](#)
- [Oracle 11G JDBC driver 11.1.0.6](#)
- AdoptOpenJDK (build 11.0.6+10)
- [Microsoft .NET Framework 4.7.1](#)
- OpenSSL 1.1.1c
- TLS 1.2